
Lifting Solutions Group
Axel Johnson International

Trulift 8F

Product information

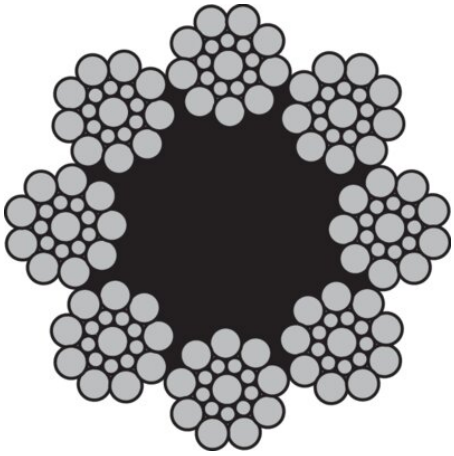


Also available in Filler (12/6&6F/1) and Warrington (6&6/6/1) constructions.
Excellent stretch characteristics.

... *Read more*

Features: High quality eight strand fibre core lift rope.
Marking: According to standard
Finish: Ungalvanised.
Standard: EN 12385-5

Fill factor: 0.44
Tolerance Ø: 0% to +6%

Elevator



© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Trulift 8F

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
106100804130079	8	1,370/1,770	Bright	sZ	28.1	22	SupplierStandard	22.2
106100904130079	9	1,370/1,770	Bright	sZ	35.6	28.3	SupplierStandard	28
106101004130079	10	1,370/1,770	Bright	sZ	44	34.9	SupplierStandard	34
106101104130079	11	1,370/1,770	Bright	sZ	53.2	42.2	SupplierStandard	41
106101204130079	12	1,370/1,770	Bright	sZ	63.3	50.3	SupplierStandard	49
106101304130079	13	1,370/1,770	Bright	sZ	74.3	59	SupplierStandard	58
106101404130079	14	1,370/1,770	Bright	sZ	86.1	68.4	SupplierStandard	67
106101504130079	15	1,370/1,770	Bright	sZ	98.9	78.5	SupplierStandard	77
106101604130079	16	1,370/1,770	Bright	sZ	113	89.3	SupplierStandard	87
106101904130079	19	1,370/1,770	Bright	sZ	159	126	SupplierStandard	123
106102204130079	22	1,370/1,770	Bright	sZ	213	169	SupplierStandard	165

© November 2026 - All Rights Reserved