


Lifting Point 8-212 UNC

Product information

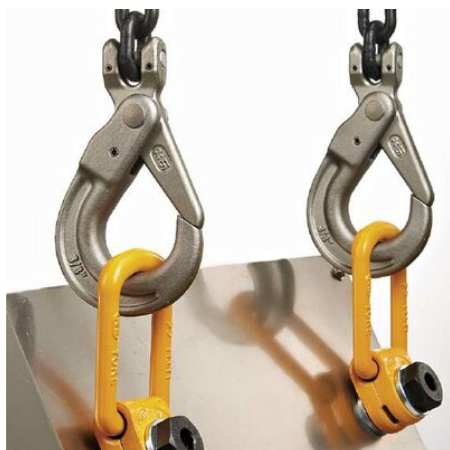

Rotates through 360° and pivot 90° Manufactured from alloy steel, quenched and tempered. Load rated parts are 100% magnaflux crack detected. Quick and simple assembly, just a tapped hole is required.

... [Read more](#)

Marking: According to standard, CE-marked, UKCA-marked
Standard: EN 1677-1

Lifting Point 8-212 UNC

Technical data

Part code	WLL ton	Thread Inch
42158212010	1	1/2
42158212015	1.5	5/8
42158212020	2.5	3/4
42158212025	2.5	7/8
42158212040	4	1
42158212050	5	1 1/4
42158212080	8	1 1/2
42158212150	15	1 3/4
42158212200	20	2