

Crane Scale Dynafor™ LLZ2



DYNAFOR™ LLZ2 devices offer the best possible quality / price ratio among electronic load indicators. They are used to measure tensile forces (N) and to determine hanging loads (kg).

Maximum display kg: 110% of the WLL.

Sensor material: Aluminium.

Autonomy: 350 hours.

Battery type/life: 2 × 1.5V "AAA" batteries/350 hours;

Packaging: Delivered in plastic suitcase.

Protection: IP 65.

Temperature range: -20°C up to +50°C.

Safety factor: 4:1.




Select a row from the table below, then click the add to quote button

Part Code	WLL ton	Model	Test load tons	Increment kg	Resolution 0.3% FS ± kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight kg
--	1	LLZ2 1t	1,5	1	3	191	164	22	83,5	22	19,8	36,4	37,6	0,75
--	3,2	LLZ2 3.2t	4,8	5	9,6	191	164	22	99,5	22	19,8	36,4	44,8	0,93
--	6,3	LLZ2 6.3t	9,6	10	18,9	236	184	28	121,5	22	19,8	36,4	54,7	1,44
--	12,5	LLZ2 12.5t	18,75	20	37,5	277	226	42	120,5	45	40,5	59,4	60,0	3,22
--	20	LLZ2 20t	30	50	60	342	264	54	147	45	40,5	59,4	73,5	4,95

1

Add to quote

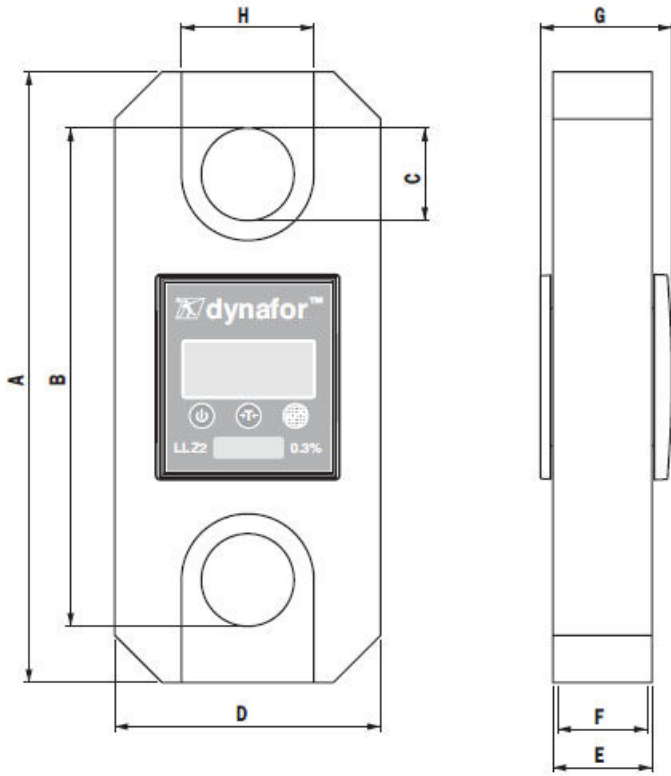

Unit C1, Harworth Industrial Estate
Bryans Close
Harworth
Doncaster
DN11 8RY

01302 756 777
info@certex.co.uk