

Swivel Eye / Eye Crosby S5



Design: Swivel with eyes equipped with tapered roller thrust bearing.

Features:

- Suitable for frequent rotation under load.
- All swivels individually Proof Tested to 2 times the Working Load Limit.
- Pressure lube fitting provided
- Other types and capacities up to 1250 t available on demand.

Marking: CE-marked

Note: Always check before use if your steel wire rope is suitable for use with a swivel.

Warning: Not to be used on demolition- (wrecking-) balls!

Safety factor: 5:1




Select a row from the table below, then click the add to quote button

Part Code	WLL ton	Rope Ø mm	Swivel No	D mm	G mm	Q mm	R mm	S mm	T mm	Weight kg
--	3	13	3-S-5	239	70	19.1	26.2	28.4	31.8	3.86
--	5	16	5-S-5	249	76	25.4	32.5	31.8	31.8	5.13
--	8.5	19	8-S-5	302	102	31.8	35.8	41.1	38.1	13.3
--	10	22	10-S-5	394	114	42.9	42.9	70	47.8	19.1
--	15	26	15-S-5	416	127	49.3	51.5	70	54	22.2
--	25	-	25-S-5	565	152	57	58.5	98.5	60.5	59
--	35	-	35-S-5	565	165	57	58.5	98.5	60.5	66
--	45	-	45-S-5	673	178	63.5	64.5	102	76	98

1

Add to quote

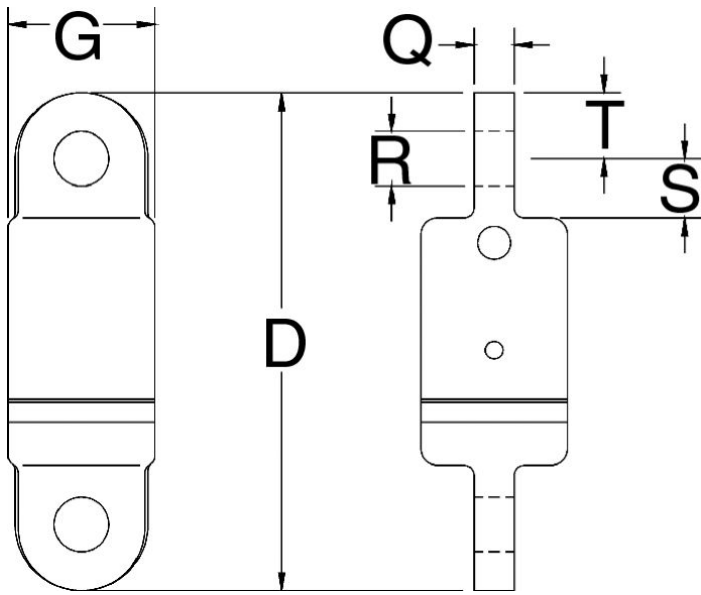

Unit C1, Harworth Industrial Estate
Bryans Close
Harworth
Doncaster
DN11 8RY

01302 756 777
info@certex.co.uk