

Horizontal Lifting Clamp IPHTONZ



Due to the special design of these clamps, they may also be utilized perpendicularly underneath a spreader beam.

The IPHSZ clamps are based on the IPHTONZ model but feature an extra-large jaw opening.

Design:

Material:

Marking:

Safety Factor: 4:1

Finish:

Standard:

Features: IPHTONZ clamps are suitable for the transport of steel plates and construction elements in the horizontal position.




Select a row from the table below, then click the add to quote button

Part Code	WLL ton	Jaw width mm	Model	Weight kg
--	0,75	0-30	0,75 IPHTONZ	4
--	1,5	0-60	1,5 IPHTONZ	9
--	3	0-60	3 IPHTONZ	14
--	3	0-100	3 IPHSZ	22
--	4,5	0-60	4,5 IPHTONZ	20
--	6	0-60	6 IPHTONZ	25
--	6	0-100	6 IPHSZ	36,4
--	9	0-60	9 IPHTONZ	31
--	9	0-100	9 IPHSZ	49,2
--	12	0-60	12 IPHTONZ	41
--	12	0-100	12 IPHSZ	62,8

1

Add to quote

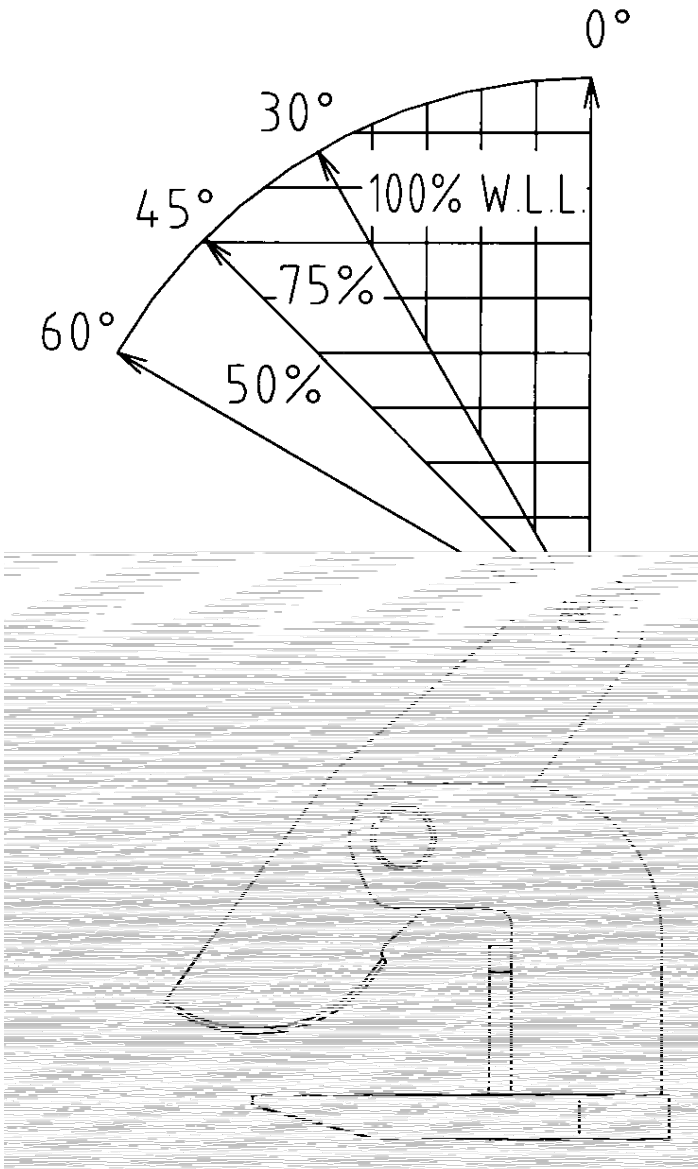

Unit C1, Harworth Industrial Estate
Bryans Close
Harworth
Doncaster
DN11 8RY

01302 756 777
info@certex.co.uk