

Metric Swivel Hoist Rings Crosby HR-125M



Features:

- The Working Load Limit and Recommended Torque value are permanently stamped into each washer.
- Washer is color coded for easy identification: Silver - Metric thread.
- Bolt specification is a Grade 12.9 Alloy socket head cap screw to DIN 912.
- Designed to be used with ferrous workpiece only.
- BOLT SIZE IDENTIFICATION: The size of the bolt will be stated as in the blueprint. Illustration shows meaning of each dimension given.




Safety factor: 5:1
Grade: 12

Select a row from the table below, then click the add to quote button

Part Code	Torque Nm	WLL ton 4:1	WLL ton 5:1	A mm	B mm	C mm	D mm	E mm	ØF mm	G mm	H mm	Weight kg
--	10	0,5	0,4	M8x1,25x40	16,9	69,9	24,6	11,8	8,5	47,5	29,9	0,17
05B0720	16	0,55	0,45	M10x1,50x40	16,9	69,9	24,6	11,8	8,5	47,5	28,1	0,18
05B0730	38	1,3	1,05	M12x1,75x50	16,9	123	49,8	22,3	17,5	85,1	60,4	1,05
05B0740	81	2,4	1,9	M16x2,00x60	26,9	123	49,8	22,3	17,5	85,1	56,3	1,11
05B0750	136	2,7	2,15	M20x2,50x65	31,9	123	49,8	22,3	17,5	85,1	52,3	1,17
05B0755	136	3,75	3	M20x2,50x75	27,8	167	75,2	34,7	25,4	124	76,6	3,09
05B0760	312	5,25	4,2	M24x3,00x80	32,8	167	75,2	34,7	25,4	124	70,5	3,21
05B0765	637	8,75	7	M30x3,50x120	61,7	222	94,2	44,5	30,5	157	102	6,53
--	1 005	13,75	11	M36x4,00x150	54	318	120	60,7	44,5	215	142	16,8
--	1 005	15,6	12,5	M42x4,50x160	64	318	120	60,7	44,5	215	136	17,4
--	1 350	16,9	13,5	M48x5,00x160	74	318	120	60,7	44,5	215	130	18

* Individually proof loaded to 2-1/2 times the Working Load Limit based on the 4:1 design factor
 ** The tightening torque values shown are based upon threads being clean, dry and free of lubrication.
 *** Bolt specification is a Grade 12.9 Alloy socket head cap screw to Din 912. All threads are metric (ASME/ANSI B18.3.1m).

1 [Add to quote](#)

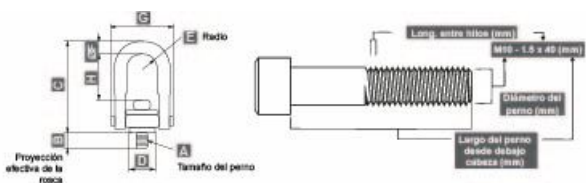

Unit C1, Harworth Industrial Estate
Bryans Close
Harworth
Doncaster
DN11 8RY

01302 756 777
info@certex.co.uk