

# Crosby HG-225, Hook / Eye



**Design:** Hook-eye. End fittings are quenched and tempered, bodies heat treated by normalizing.

**Proof:** 2 x WLL.

**Standard:** According to Federal Specifications FF-T-791b.

**Note!** Turnbuckles recommended for straight or in-line pull only.

**Marking:** Logo, size and type.

**Finish:** Hot dipped galvanized.

**Safety factor:** 5:1.




Select a row from the table below, then click the add to quote button

Part Code	WLL ton	Thread dia. & take up (mm)	Thread dia. & take up (inch)	A mm	D mm	E closed mm	F mm	J open mm	K closed mm	M open mm	N closed mm	R mm	S mm	X closed mm	BB (mm)	Weight kg
--	0.18	6,35 x 102	1/4 x 4	6,35	11,2	42,3	32,3	296	195	312	211	20,6	8,64	44,6	103	0.14
--	0.32	7,94 x 114	5/16 x 4-1/2	7,94	12,7	50,7	38,1	343	229	363	248	24,1	11,2	55,8	116	0.23
05C0140	0.45	9,53 x 152	3/8 x 6	9,53	14,2	57,8	44,7	434	282	458	306	28,7	13,5	62,9	155	0.36
--	0.68	12,7 x 152	1/2 x 6	12,7	16,5	89,7	57,9	497	345	528	376	35,8	18,0	90,4	153	0.82
--	0.68	12,7 x 305	1/2 x 12	12,7	16,5	89,2	57,9	809	504	840	535	35,8	18,0	89,9	314	1.22
--	1.02	15,9 x 152	5/8 x 6	15,9	22,9	108	71,4	536	384	574	422	45,7	22,4	110	153	1.35
--	1.02	15,9 x 305	5/8 x 12	15,9	22,9	107	71,4	850	545	888	583	45,7	22,4	110	315	1.97
--	1.36	19,1 x 152	3/4 x 6	19,1	24,9	129	84,6	574	422	621	469	53,1	25,4	130	156	1.91
--	1.36	19,1 x 305	3/4 x 12	19,1	24,9	128	84,6	889	584	936	631	53,1	25,4	129	320	2.96
--	1.36	19,1 x 457	3/4 x 18	19,1	24,9	129	84,6	1,194	737	1,241	784	53,1	25,4	130	471	3.74
--	1.81	22,2 x 305	7/8 x 12	22,2	28,7	148	96,0	917	612	971	666	60,5	31,8	147	309	4.24
--	2.27	25,4 x 305	1 x 12	25,4	31,8	167	108	956	652	1,018	713	76,2	36,3	165	309	6.29

1

Add to quote

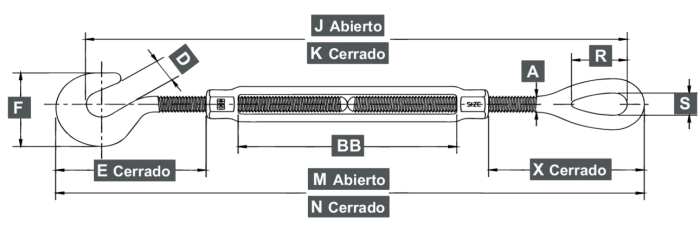

---

Unit C1, Harworth Industrial Estate  
Bryans Close  
Harworth  
Doncaster  
DN11 8RY

01302 756 777  
[info@certex.co.uk](mailto:info@certex.co.uk)