

POWERTEX Dee Shackle PDSB

POWERTEX

Design: Dee type shackle supplied with head-bolt with nut and stainless cotter pin. According to EN 13889 and meets performance requirements of US Federal Specification RR-C-271 Type IVB Class 3, Grade A.

Material: Forged alloy steel, supplied with alloy bolt.

Marking: According to standard, WLL, CE, size, grade, batch number and manufacturer ID.

Finish: All parts hot dip galvanized + head-bolt and nut additional powder painted.

Standard: EN 13889

Warning: Not to be heat-treated

Safety factor: 6:1.

Grade: 6



Select a row from the table below, then click the add to quote button

Part Code	Code	WLL ton	Nominalsize In.	Pin Ø d1 mm	a* mm	c* mm	d mm	d2 (mm)	H1 mm	Weight kg
05A4355	1202	0.5	1/4	8	13	22	6,5	17,5	42,5	0.05
05A4360	1203	0.75	5/16	9,5	13,5	25,5	8	21	47	0.086
05A4370	1204	1	3/8	11,2	17	30,9	10	25	56,5	0.16
05A4375	1205	1.5	7/16	12,7	18,5	36,4	11	27	63,5	0.215
05A4380	1206	2	1/2	15,8	20,6	41,4	12,7	30,5	75,5	0.34
05A4390	1207	3.25	5/8	18,8	27	51	16	40	92	0.6
05A4400	1208	4.75	3/4	22	32	63	19	48	106	1.02
05A4410	1209	6.5	7/8	25	37	72	22	54	120	1.6
05A4420	1210	8.5	1	28	43,5	81,75	26,5	60	135	2.3
05A4430	1211	9.5	1-1/8	32	48	94	29	68	143	3.33
05A4440	1212	12	1-1/4	35	53	102	32	76	164	4.3
05A4445	1213	13.5	1-3/8	38	59	113,5	35	84	182	5.87
05A4450	1214	17	1-1/2	42	62	123	38	92	195	7.6
05A4455	1215	25	1-3/4	50	75	148	45	106	224	11.7
05A4460	1216	35	2	56	84	174,5	52	122	248	17.84
05A4465	1217	55	2-1/2	70	107	205,5	66	145	302	33

*Tolerance: +/- 5%

1


Add to quote

Manuals

Manuals

Select ▾

Download

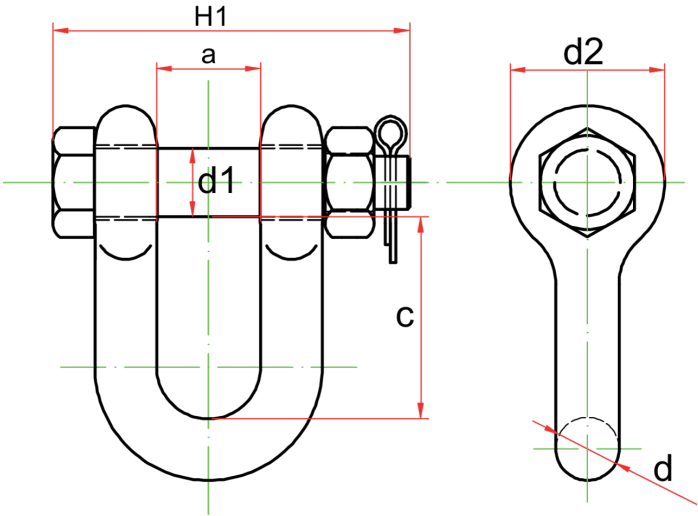

Unit C1, Harworth Industrial Estate
Bryans Close
Harworth
Doncaster
DN11 8RY

01302 756 777
info@certex.co.uk