

# Screw Pin Anchor Shackle Crosby G-209



Screw pin anchor shackles meet the performance requirements of Federal Specification RR-C-271G Type IVA, Grade A, Class 2, except for those provisions required of the contractor.

**Proof load:** 2 x WLL.

**Material:** Carbon steel with headbolt in alloy steel.

**Marking:** According to standard, CE-marked

**Temperature range:** -40°C up to +204°C

**Finish:** Hot dip galvanized.

**Standard:** EN 13889


**Safety factor:** 6:1

**Grade:** 6



Select a row from the table below, then click the add to quote button

| Part Code | WLL ton | Nominal size In. | A mm | B mm | C mm | D mm | E mm | F mm | G mm | H mm | L mm | M mm | P mm | Weight kg |
|-----------|---------|------------------|------|------|------|------|------|------|------|------|------|------|------|-----------|
| 05A0190   | 0.33    | 3/16             | 9,65 | 6,35 | 22,4 | 4,85 | 15,2 | 14,2 | 24,9 | 37,3 | 4,06 | 28,4 | 4,85 | 0.03      |
| 05A0200   | 0.5     | 1/4              | 11,9 | 7,85 | 28,7 | 6,35 | 19,8 | 15,5 | 32,5 | 46,7 | 4,85 | 35,1 | 6,35 | 0.05      |
| 05A0205   | 0.75    | 5/16             | 13,5 | 9,65 | 31,0 | 7,85 | 21,3 | 19,1 | 37,3 | 53,0 | 5,60 | 42,2 | 7,85 | 0.09      |
| 05A0210   | 1       | 3/8              | 16,8 | 11,2 | 36,6 | 9,65 | 26,2 | 23,1 | 45,2 | 63,0 | 6,35 | 51,5 | 9,65 | 0.14      |
| 05A0220   | 1.5     | 7/16             | 19,1 | 12,7 | 42,9 | 11,2 | 29,5 | 26,9 | 51,5 | 74,0 | 7,85 | 60,5 | 11,2 | 0.17      |
| 05A0230   | 2       | 1/2              | 20,6 | 16,0 | 47,8 | 12,7 | 33,3 | 30,2 | 58,5 | 83,5 | 9,65 | 68,5 | 12,7 | 0.33      |
| 05A0240   | 3.25    | 5/8              | 26,9 | 19,1 | 60,5 | 16,0 | 42,9 | 38,1 | 74,5 | 106  | 11,2 | 85,0 | 17,5 | 0.62      |
| 05A0250   | 4.75    | 3/4              | 31,8 | 22,4 | 71,5 | 19,1 | 51,0 | 46,0 | 89,0 | 126  | 12,7 | 101  | 20,6 | 1.07      |
| 05A0260   | 6.5     | 7/8              | 36,6 | 25,4 | 84,0 | 22,4 | 58,0 | 53,0 | 102  | 148  | 12,7 | 114  | 24,6 | 1.64      |
| 05A0270   | 8.5     | 1                | 42,9 | 28,7 | 95,5 | 25,4 | 68,5 | 60,5 | 119  | 167  | 14,2 | 129  | 26,9 | 2.28      |
| 05A0280   | 9.5     | 1 1/8            | 46,0 | 31,8 | 108  | 29,5 | 74,0 | 68,5 | 131  | 190  | 16,0 | 142  | 31,8 | 3.36      |
| 05A0300   | 12      | 1 1/4            | 51,5 | 35,1 | 119  | 32,8 | 82,5 | 76,0 | 146  | 210  | 17,5 | 156  | 35,1 | 4.31      |
| 05A0310   | 13.5    | 1 3/8            | 57,0 | 38,1 | 133  | 36,1 | 92,0 | 84,0 | 162  | 233  | 19,1 | 174  | 38,1 | 6.14      |
| 05A0320   | 17      | 1 1/2            | 60,5 | 41,4 | 146  | 39,1 | 98,5 | 92,0 | 175  | 254  | 20,6 | 187  | 41,1 | 7.8       |
| 05A0330   | 25      | 1 3/4            | 73,0 | 51,0 | 178  | 46,7 | 127  | 106  | 225  | 313  | 25,4 | 231  | 57,0 | 12.6      |
| 05A0340   | 35      | 2                | 82,5 | 57,0 | 197  | 53,0 | 146  | 122  | 253  | 348  | 31,0 | 263  | 61,0 | 20.4      |
| 05A0350   | 55      | 2 1/2            | 105  | 70,0 | 267  | 69,0 | 184  | 145  | 327  | 453  | 35,1 | 330  | 79,5 | 38.9      |

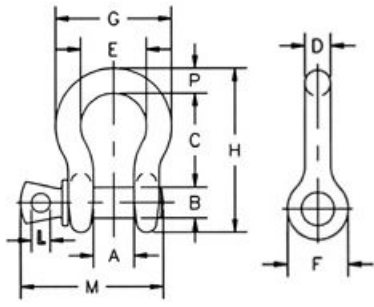

---

Unit C1, Harworth Industrial Estate  
Bryans Close  
Harworth  
Doncaster  
DN11 8RY

[01302 756 777](tel:01302756777)  
[info@certex.co.uk](mailto:info@certex.co.uk)