

Shackle G-209



Design: Screw pin anchor shackle.

Proof load: 2 x WLL.

Material: Carbon steel with headbolt in alloy steel.

Marking: WLL.

Finish: Galvanized with painted bolt.

Safety factor: 6:1.

Grade: 6




Select a row from the table below, then click the add to quote button

Part Code	WLL ton	Nominal size In.	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	L mm	M mm	P mm	Weight kg
05A0190	0.33	3/16	9,65	6,35	22,4	4,85	15,2	14,2	24,9	37,3	4,06	28,4	4,85	0.03
05A0200	0.5	1/4	11,9	7,85	28,7	6,35	19,8	15,5	32,5	46,7	4,85	35,1	6,35	0.05
05A0205	0.75	5/16	13,5	9,65	31,0	7,85	21,3	19,1	37,3	53,0	5,60	42,2	7,85	0.09
05A0210	1	3/8	16,8	11,2	36,6	9,65	26,2	23,1	45,2	63,0	6,35	51,5	9,65	0.14
05A0220	1.5	7/16	19,1	12,7	42,9	11,2	29,5	26,9	51,5	74,0	7,85	60,5	11,2	0.17
05A0230	2	1/2	20,6	16,0	47,8	12,7	33,3	30,2	58,5	83,5	9,65	68,5	12,7	0.33
05A0240	3.25	5/8	26,9	19,1	60,5	16,0	42,9	38,1	74,5	106	11,2	85,0	17,5	0.62
05A0250	4.75	3/4	31,8	22,4	71,5	19,1	51,0	46,0	89,0	126	12,7	101	20,6	1.07
05A0260	6.5	7/8	36,6	25,4	84,0	22,4	58,0	53,0	102	148	12,7	114	24,6	1.64
05A0270	8.5	1	42,9	28,7	95,5	25,4	68,5	60,5	119	167	14,2	129	26,9	2.28
05A0280	9.5	1 1/8	46,0	31,8	108	29,5	74,0	68,5	131	190	16,0	142	31,8	3.36
05A0300	12	1 1/4	51,5	35,1	119	32,8	82,5	76,0	146	210	17,5	156	35,1	4.31
05A0310	13.5	1 3/8	57,0	38,1	133	36,1	92,0	84,0	162	233	19,1	174	38,1	6.14
05A0320	17	1 1/2	60,5	41,4	146	39,1	98,5	92,0	175	254	20,6	187	41,1	7.8
05A0330	25	1 3/4	73,0	51,0	178	46,7	127	106	225	313	25,4	231	57,0	12.6
05A0340	35	2	82,5	57,0	197	53,0	146	122	253	348	31,0	263	61,0	20.4
05A0350	55	2 1/2	105	70,0	267	69,0	184	145	327	453	35,1	330	79,5	38.9

1

Add to quote

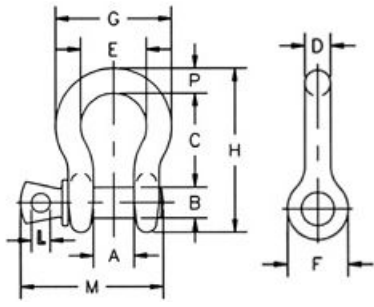

Unit C1, Harworth Industrial Estate
Bryans Close
Harworth
Doncaster
DN11 8RY

[01302 756 777](tel:01302756777)
info@certex.co.uk