

# Crosby Lebus Load Binders

Crosby Load Binders to provide safe and secure transport of heavy loads.

Heel of binder toggles away from load, permitting easy release.

One piece assembly with no bolts or nuts to loosen.


Alloy Steel.

Heat Treated.

Finish – Self Coloured.

Permanently embossed with CG and 8 (Grade).

Chain specification EN818-2.

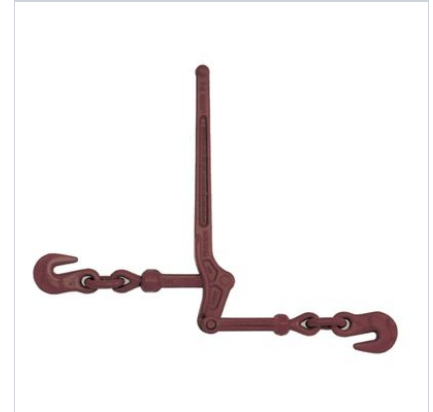

**Features:** Forged Steel - Quenched and Tempered with extra heavy construction at leverage point to prevent spreading.

Currently this product cannot be added to an online quote. Please contact us directly for enquires.

Min/Max chain size (mm)	Working Load Limit (t)	Weight Each (kg)	Take Up (mm)
8/10	2.45	3.18	114
8/13	4.17	5.66	114
13/16	5.9	8.93	121

Min/Max chain size (mm)	Working Load Limit (t)	Weight Each (kg)	Take Up (mm)
8/10	4	5.49	203
8/13	6.8	6.66	203
13/16	7.26	6.6	203

Chain size (mm)	Working Load Limit (t)	Meters per drum	Nominal pitch (mm)	Inside width (mm)	Weight per meter (kg)
Size (mm)	Load Limit (t)	Per Drum	pitch (mm)	Width (mm)	per metre (kg)
8	2	200	24	12.2	1.7
10	3.15	200	30	13	2.2
13	5.3	100	39	16.9	3.6
16	8	100	48	20.8	5.4

It is recommended that Lebus Load binders are used in conjunction with Spectrum 8 alloy chain. Other load binders are available.