


Home / Products / Slings

## **Round Sling EXTREEMA®**

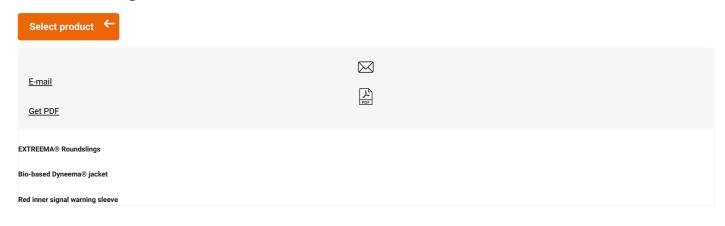

Product information

Unlike braided fibre ropes, the construction of@roENdistEtylis based on parallel laid fiber technology that make up the core.

\$ teeboneaovaing ENTINETENING bias is said ways is reached vise 0.80% to timpes
These round slings are now produced bio-base ® wither By neema

Alijangk Ethes leighte converve perotectally heavers to alterial the proceptions starmed setting starmed setting between the little proceptions and the produced bio-base of the proceptions of the process to alterial the process to alterial the process to be the produced by the produced bio-base of the process to alterial the process to be the produced by the process to be the process to be the process to be the produced by the process to be the process

Strangt keit steget conventends lyter core to a ceeta the conceptant standiscondisting the core to a ceeta the conceptant standiscondisting brought Dyneemadvantages:

Documents

## **FILTERS & SUBCATEGORIES**



Select the variant of your choice.

XXX = last 3 digits in article number indicates the effective working length in m. (EWL). Example XXX (020) = 2 m. All data in this table is indicative.

MBL 2500T straight pull, MBL 5000T in basket hitch (U-lift)

Available with an MBL up to 4000T (WLL=500T SF5) and lengths up to 65m  $\,$ 

## **Related products**

Unit C1, Harworth Industrial Estate Bryans Close Harworth Doncaster DN11 8RY 01302 756 777

info@certex.co.uk