

# Thimble Crosby G-414, Extra heavy



**General:**

The use of the G-414 extra heavy thimbles for your wirerope slings ensures a greater protection against wear of the wire rope and deformation of the wire rope eye.

**Features:**

- Longer service life.

**Material:** Steel

**Marking:** According to standard

**Finish:** Hot-dip galvanised

**Standard:** EN 13411-1




Select a row from the table below, then click the add to quote button

Part Code	Wire Ø (mm)	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight kg/100pc
--	6-7	55.5	41.4	38.1	22.4	11,2	7.1	1.5	5.85	3
--	8	63.5	47.8	46	26.9	14,0	8.65	2.05	7.1	5.35
--	9-10	73,0	54,0	54	28.7	16,8	10.4	2.8	8.65	9.8
--	11-12	82.5	60.5	60.5	31.8	18,8	11.9	3.3	9.65	15.7
04D0410	13-15	92,0	70,0	70,0	38.1	23.4	13,5	3.55	10.4	23.1
04D0420	16	108	82.5	79.5	44.5	26,2	16.8	4.05	12.7	34.3
04D0430	18-20	127	95.5	96,5	51	33,0	19.8	5.6	16.8	72
04D0440	22	140	108	108	57	37,3	23.9	5.6	19.1	81
04D0442	24-26	156	114	125	63.5	44,5	26.9	6.35	22.4	142
04D0443	28-32	178	130	149	73	47,8	33.3	6.35	28.7	181
04D0444	32-35	230	165	173	89	57,2	36.6	9.65	28.7	402
04D0445	35-38	229	159	181	89	66,5	39.6	12.7	28.7	587
--	40	286	203	207	102	76,2	43.7	12.7	35.1	771
04D0447	44	310	229	216	114	77,7	46.7	12.7	33.3	805
04D0449	48-52	384	305	264	152	85,9	53,0	12.7	38.1	1,259
--	56	435	356	302	178	98,6	60.5	16,0	41.4	1,792

1

Add to quote

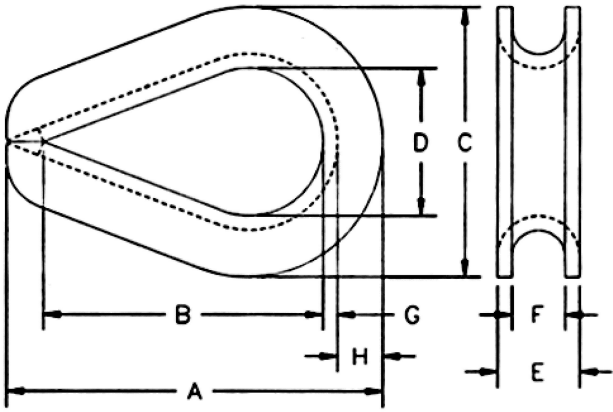

---

Unit C1, Harworth Industrial Estate  
Bryans Close  
Harworth  
Doncaster  
DN11 8RY

01302 756 777  
[info@certex.co.uk](mailto:info@certex.co.uk)