


# Endurance 50DB

## BRIDON

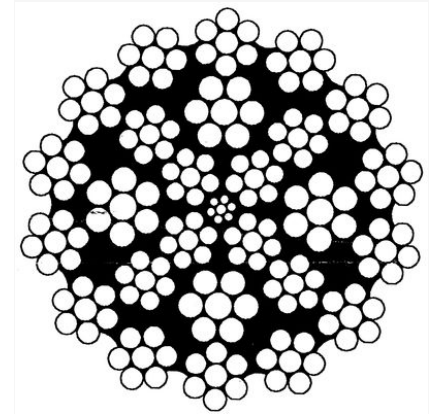

Excellent Resistance to Rotation giving over three times more lifting height than a conventional 18 x 7 class rope  
Flexibility is optimised by the unique strand and rope construction.  
Langs Lay construction combines excellent wear characteristics with efficient spooling on the drum.

**Standard:** EN 12385-4

**ISO 4309 Rope Category No:** All Diameters **RCN.23-1**

**Features:** Very High Breaking Load

**Material:** High Carbon Steel

**Marking:** On Termination ID and CE mark

**Finish:** Galvanised as standard

**Fill factor:** 0.64

Select a row from the table below, then click the add to quote button

Part Code	Rope diameter mm	Min. breaking force kN 1960 N/mm <sup>2</sup>	Minimum breaking force Rope grade 1960 ton	Weight kg/100m
--	8	49,6	5,06	27,6
--	9	62,8	6,41	34,4
--	10	77,6	7,91	42,5
--	11	93,9	9,6	51,8
--	12	112	11,4	61,9
--	13	131	13,4	72,8
--	14	152	15,5	83,6
--	15	175	17,8	96
--	16	199	20,2	110
--	17	224	22,9	121
--	18	251	25,6	136
--	19	280	28,5	156
--	20	310	31,6	168
--	21	342	34,9	185
--	22	375	38,3	206

---

Unit C1, Harworth Industrial Estate  
Bryans Close  
Harworth  
Doncaster  
DN11 8RY

01302 756 777  
info@certex.co.uk