


# Ropetex 55

**ROPETEX**



Excellent Resistance to Rotation giving over three times more lifting height than a conventional 18 x 7 class rope. Flexibility is optimised by the unique strand and rope construction. Langs Lay construction combines excellent wear characteristics with efficient spooling on the drum.

RopeTex Ropes are lubricated with the very latest High Performance Wire rope lubricants to give excellent corrosion protection, fatigue life combined with low fling off

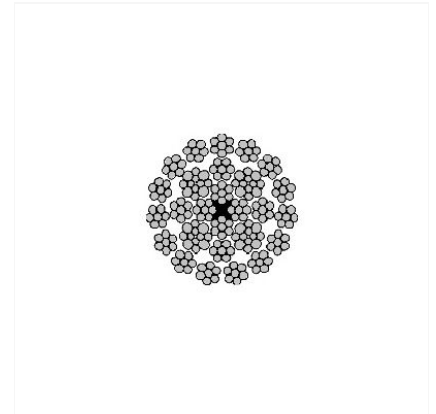

**ISO 4309 Rope Category No:** All Diameters **RCN.23-1**

**Features:** Very High Breaking Load

**Material:** High Carbon Steel

**Marking:** According to standard

**Finish:** Galvanised as standard

**Standard:** EN 12385-4

**Fill factor:** 0,64

Select a row from the table below, then click the add to quote button

Part Code	Rope diameter mm	Min. breaking force ton	Weight kg/100m
01D0200	8	5,15	27,6
01D0210	9	6,52	34,4
01D0220	10	8,05	43
01D0230	11	9,75	52
01D0230	12	11,62	62
01D0250	13	13,66	72
01D0260	14	15,8	84
01D0270	15	18,14	96
01D0280	16	20,6	110
--	17	23,2	120
01D0290	18	26,1	135
01D0300	19	29,1	150
01D0310	20	32,2	166
01D0320	22	38,94	201
01D0330	24	46,38	245
01D0340	26	53,72	297
01D0350	28	62,38	345

1

Add to quote

## info / downloads

info / downloads

Select ▾

Download

Unit C1, Harworth Industrial Estate  
Bryans Close  
Harworth  
Doncaster  
DN11 8RY

[01302 756 777](tel:01302756777)  
[info@certex.co.uk](mailto:info@certex.co.uk)