

Trulift 8F



Also available in Filler (12/6&6F/1) and Warrington (6&6/6/1) constructions.
Excellent stretch characteristics.

Features: High quality eight strand fibre core lift rope.


Marking: According to standard

Finish: Ungalvanised.

Standard: EN 12385-5

Fill factor: 0.44

Tolerance Ø: 0% to +6%

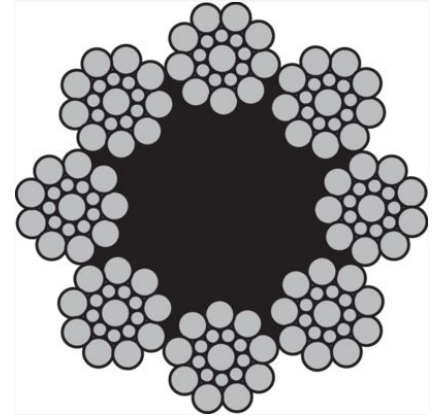

Elevator

Select a row from the table below, then click the add to quote button

Part Code	Rope diameter mm	Steel Area mm ²	Min. breaking force kN 1370/1770 N/mm ²	Weight kg/m
--	8	22	28,1	22,2
--	9	28,3	35,6	28
--	10	34,9	44	34
--	11	42,2	53,2	41
--	12	50,3	63,3	49
--	13	59	74,3	58
--	14	68,4	86,1	67
--	15	78,5	98,9	77
--	16	89,3	113	87
--	19	126	159	123
--	22	169	213	165

1

Add to quote