

Trulift 8S



- Higher strength
- Lower stretch
- Uniform diameter
- Good diameter retention
- Improved fatigue performance

Tolerance more than 10 mm: 0% - +5%

Tolerance less than 10 mm: 0% - +6%

Features: High quality steel core lift rope


Material: High Carbon Steel

Marking: According to standard, On Termination ID and CE mark

Finish: Ungalvanised

Standard: EN 12385-5

Fill factor: 0.59

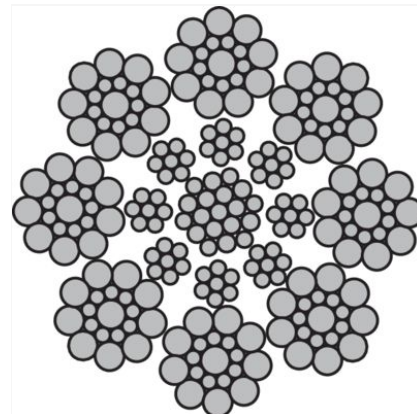

Elevator

Select a row from the table below, then click the add to quote button

Part Code	Rope diameter mm	Steel Area mm ²	Min. breaking force kN 1570 N/mm ²	Weight kg/100m
--	9	38,1	48	34
--	10	46,6	58,5	41
--	11	55,6	69,7	49
--	12	66,4	83,6	59
--	13	79,5	100	70
--	14	91,8	116	81
--	15	104	131	92
--	16	118	148	105

Other dimensions on request.

1

Add to quote