


Wire rope Dyform 34LR / 34LR-PI

BRIDON

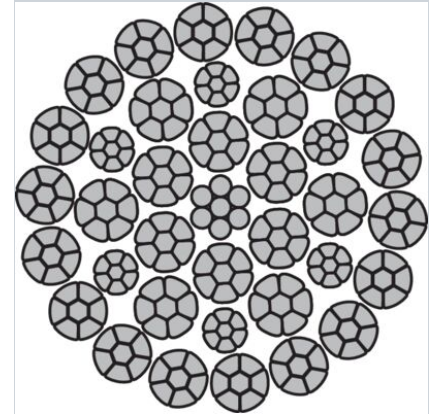

Very Low Rotation.

Superior bending fatigue life when compared with conventional low rotation ropes.

Excellent resistance to crushing and abrasion particularly on multi layer drums resulting from the compacted strands.

Reduced elongation results from increased steel content and the Dyform process.

Optional plastic impregnation to further extend fatigue life, improve structural stability and resistance to corrosion.

ISO 4309 Rope Category No: 10-40mm **RCN.23-2**, 42-76mm **RCN.31**

Features: Extremely strong low rotation Crane Hoist Rope.

Material: High Carbon Steel

Marking: According to standard, On Termination ID and CE mark

Finish: Galvanised or Ungalvanised

Standard: EN 12385-4

Fill factor: 0.76

Select a row from the table below, then click the add to quote button

Part Code	Diameter mm	Weight kg/100m
--	10	51.4
--	11	61.7
--	12	72.9
--	13	84.6
--	14	97.1
--	15	114
--	16	130
--	17	140
--	18	159
--	19	178
--	20	197
--	21	222
--	22	240
--	23	261
--	24	286
--	25	312
--	26	340
--	27	356

--	28	391
--	29	425
--	30	445
--	32	505
--	34	574
--	35	602
--	36	644
--	38	712
--	40	807
--	42	884
--	44	961
--	46	1,060
--	48	1,150
--	50	1,230
--	52	1,360
--	54	1,450
--	56	1,560
--	58	1,680
--	60	1,800
--	62	1,920
--	64	2,050
--	66	2,170
--	68	2,310
--	70	2,450
--	72	2,590
--	74	2,730
--	76	2,880

Larger sizes available on request.

10mm - 40mm

34x7 WSC - Compact Strands

42mm - 68mm

34x19 WSC - Compact Strands

70mm - 76mm

34x31 WSC - Compact Strands

1

Add to quote

Unit C1, Harworth Industrial Estate
 Bryans Close
 Harworth
 Doncaster
 DN11 8RY

01302 756 777
info@certex.co.uk