

Steel Wire Rope 6x7-WSC




Rope construction: 6x7-WSC (7x7)

Marking: According to standard

Temperature range: -40°C up to +200°C, for operating temperatures between 100 °C and 200 °C reduce MBF by minus 10 %

Standard: EN 12385-4

Fill factor: 0,55

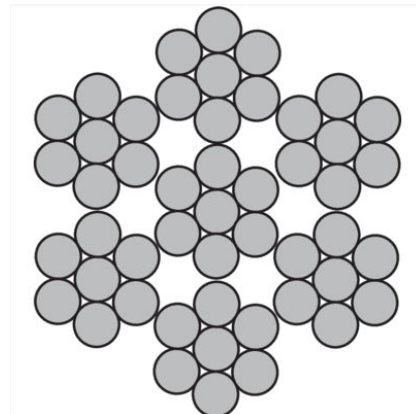

Select a row from the table below, then click the add to quote button

Part Code	Rope diameter mm	Steel Area mm ²	Min. breaking force kN 1770 N/mm ²	Weight kg/100m
--	1.8	1.4	2.06	1.24
--	2	1.73	2.75	1.54
--	2.3	2.29	3.36	2.03
--	3	3.89	6.18	3.46
--	4	6.91	11	6.14
--	5	10.8	17.2	9.6
--	6	15.6	24.7	13.8
--	7	21.2	33.7	18.8
--	8	27.6	44	24.6
--	9	35	55.6	31.1
--	10	43.2	68.7	38.4
--	11	52.3	83.1	46.5
--	12	62.2	98.9	55.3
--	13	73	116	64.9
--	14	84.7	135	75.3
--	15	97.2	155	86.4
--	16	111	176	98.3
--	18	140	223	124
--	20	173	275	154

Other dimensions on request.

1

Add to quote

Unit C1, Harworth Industrial Estate
Bryans Close
Harworth
Doncaster
DN11 8RY

01302 756 777
info@certex.co.uk