

POWERTEX Chain slings G100

POWERTEX

General: POWERTEX chain slings for efficient and safe operation. All slings are equipped with integrated shorting hooks and safety lifting hooks. For convenient storage and transportation, slings are supply in reusable packaging.

Material: Alloy steel grade 10

Marking: WLL, Serial No., Manufacturer ID, CE

Finish: Painted

Warning: Not to be heat-treated

Safety factor: 4:1

Grade: 10



Select a row from the table below, then click the add to quote button


Part Code	Length m	chain Ø mm	WLL β 0°-45° ton	WLL β 45°-60° ton	A mm	B mm	P mm	Weight kg
11.91PCX46606015	1.5	6	3,0	2.12	160	95	28	7.9
11.91PCX46606020	2,0	6	3,0	2.12	160	95	28	9.6
11.91PCX46608020	2,0	8	5.3	3.75	170	105	34	17.7
11.91PCX46608025	2.5	8	5.3	3.75	170	105	34	20.7
11.91PCX46608030	3,0	8	5.3	3.75	170	105	34	23.8
11.91PCX46610025	2.5	10	8,0	6,0	190	110	44	31.9
11.91PCX46610030	3,0	10	8,0	6,0	190	110	44	36.5
11.91PCX46610035	3,5	10	8,0	6,0	190	110	44	41.1

* β - angle of any leg to the vertical

Other dimensions, WLL and special lengths on request.

1

Add to quote

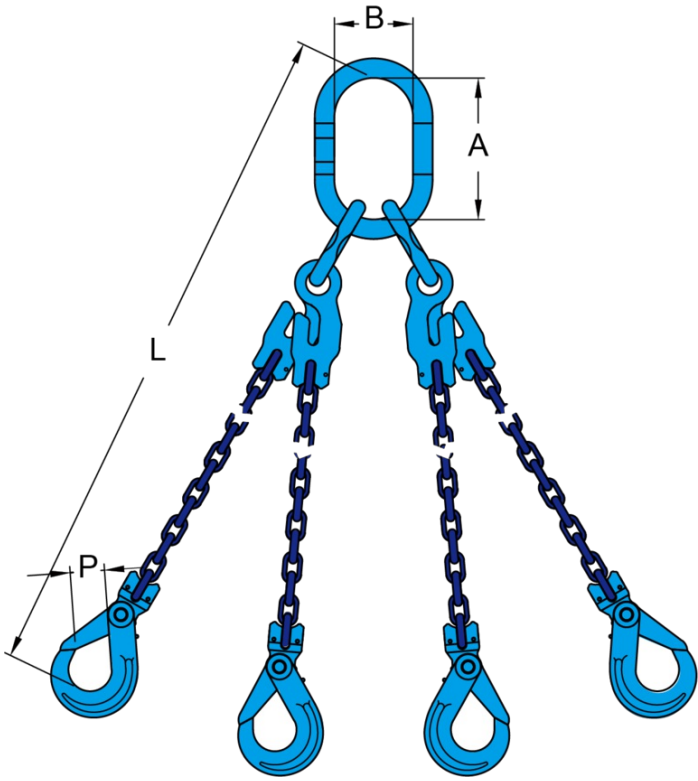

Unit C1, Harworth Industrial Estate
Bryans Close
Harworth
Doncaster
DN11 8RY

[01302 756 777](tel:01302756777)
info@certex.co.uk